




# JÆRBU FERTILISER PUMPS

Simple maintenance.

Long service life.

**JÆRBU**  
GJØDSELPUMPE



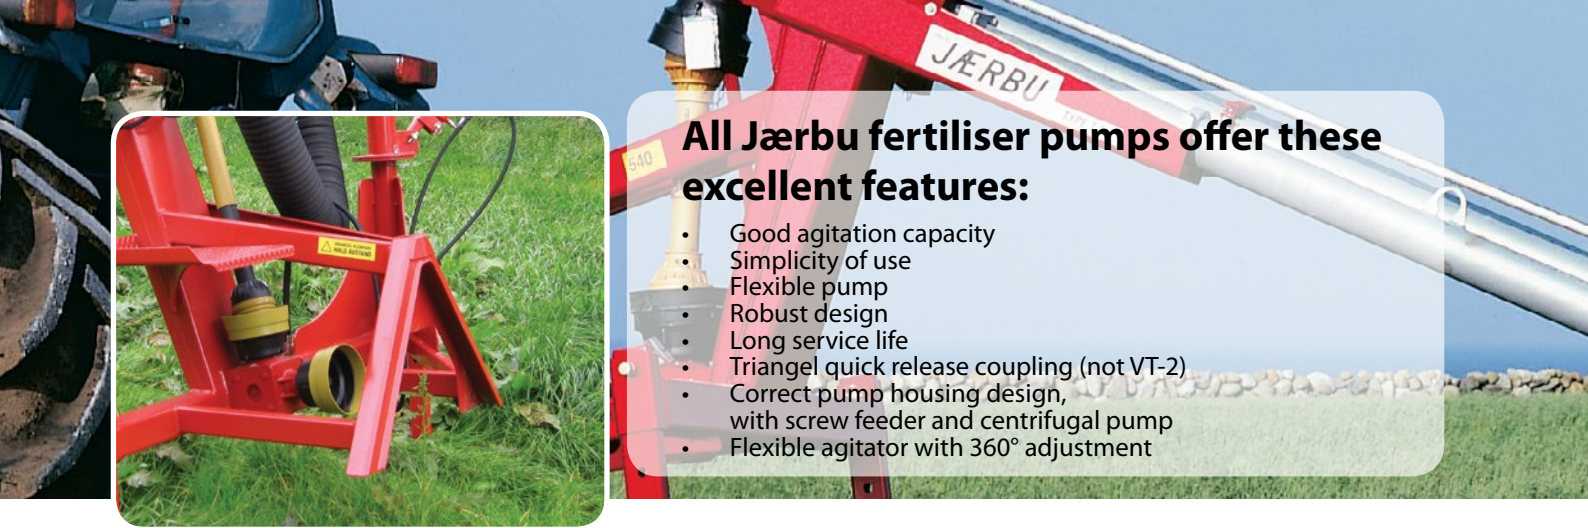

## All Jærbu fertiliser pumps offer these excellent features:

- Good agitation capacity
- Simplicity of use
- Flexible pump
- Robust design
- Long service life
- Triangel quick release coupling (not VT-2)
- Correct pump housing design, with screw feeder and centrifugal pump
- Flexible agitator with 360° adjustment

Type T-2



## For installation above gate

### TECHNICAL SPECIFICATIONS:

Length:	4.45 m.
Height:	2.85 m to top of loading line.
Weight:	500 kg.
Load capacity:	Approx. 6-10,000 l/min. @ 540 rpm
Loading line dimension:	5"
Recommended tractor size:	From approx. 35 kW (45 Hp).

Type T-2L



## For basements below ground level

### TECHNICAL SPECIFICATIONS:

Length:	4.45 m.
Height:	1.7 m to top of loading line.
Weight:	475 kg.
Load capacity:	Approx. 6-10,000 l/min. @ 540 rpm
Loading line dimension:	5"
Recommended tractor size:	From approx. 35 kW (45 Hp).

Type T-2VV



## Variable Angle


### TECHNICAL SPECIFICATIONS:

Length:	4.45 m.
Height:	2.8 m to top of loading line.
Weight:	520 kg.
Load capacity:	Approx. 6-10,000 l/min. @ 540 rpm
Loading line dimension:	5"
Recommended tractor size:	From approx. 35 kW (45 Hp)



- Highly efficient centrifugal pump
- Special screw feeder
- 360° continuously rotatable agitator mounted directly on the pump housing, providing efficient agitation
- Special bearing with long service life needs no lubrication
- Valve for switching over under full pressure
- Hot-dip galvanised line

**Building dimensions on pump housings:**  
Width: 630 mm – Height: 700 mm

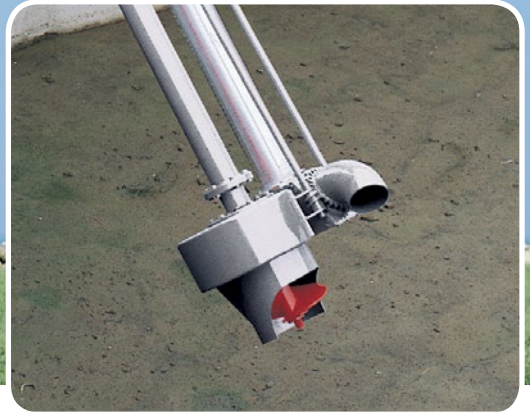

## For combination use

### TECHNICAL SPECIFICATIONS:

Depth:	Up to 4.0 m.
Weight:	550 kg.
Recommended tractor size:	From approx. 35 kW (45 Hp).
Loading line dimension:	5"
Load capacity:	Approx. 6-10,000 l/min. @ 540 rpm

### T-2 kombi



## For vertical installation

### TECHNICAL SPECIFICATIONS:

Depth:	From 2.7 m to 4.8 m.
Weight:	410 kg (applicable to VT-2-32).
Load capacity:	Approx. 6-10,000 l/min. @ 540 rpm
Loading line dimension:	5"
Recommended tractor size:	From approx. 35 kW (45 Hp)

### Type VT-2



## Accessories

- Power transmission shaft with wide angle
- Extra long jib/loading line (max. length 6 metres)
- Side-mounted load carrier
- HMV quick release coupling (Triangel is supplied as standard with oblique pumps)
- Cutter blade
- Dosing pump for vegetable oil

### Side-mounted load carrier



**Wireless  
remote control**



Our proprietary series of fertiliser pumps first saw the light of day in the mid-1980s.

Our aim was to create a pump with a robust design that was highly flexible, easy to maintain and offered a long service life.

We sell directly to consumers, cutting out expensive middlemen and making the price of Jærbu pumps highly competitive. We are one of Norway's biggest suppliers of fertiliser pumps.



Manufacturer

**Ole G**  
Nord-Varhaug & Co a-s

Hatleveien 4, postboks 14, 4368 Varhaug  
Phone +47 51 79 35 50  
[www.jaerbu.no](http://www.jaerbu.no)